



Brass nickel-plated ball valve fig. 3185
two-piece, full bore, handle operated

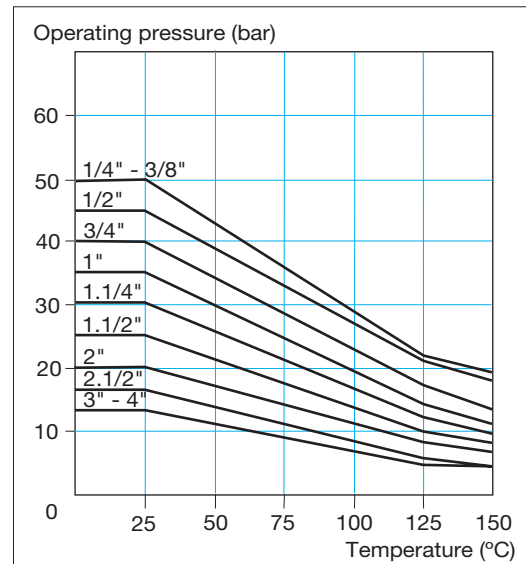

two-piece brass nickel-plated ball valve with full bore and BSP female connection and handle operation

- Material body** : CW 617 N UNI EN 12165; nickel-plated pressed brass
- Connection piece** : CW 617 N UNI EN 12165; nickel-plated pressed brass
- Spindle** : CW 614 N UNI EN 12164; nickel-plated brass
- Ball** : CW 614 N UNI EN 12164; chromed brass
- Gland** : CW 614 N UNI EN 12164; nickel-plated brass
- Seats** : PTFE
- Material spindle gaskets** : PTFE
- Material handwheel** : FE P02; steel galvanised with PVC cover
- Connection** : both sides BSP female connection as per ISO 228/1
- Construction** : Two-piece body with full bore and blow-out proof spindle
- Operating pressure/temp.** : see pressure/temperature diagram

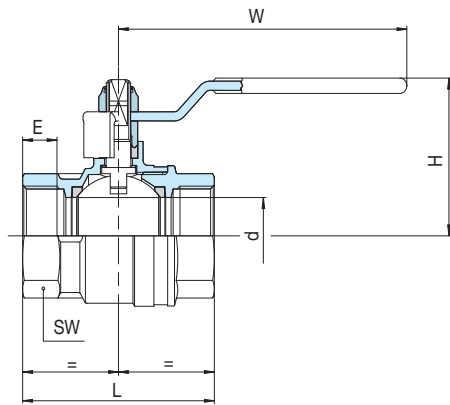

Tabel 1: Dimensions fig. 3185

BSP		1/4"	3/8"	1/2"	3/4"	1"	1. 1/4"	1. 1/2"	2"	2. 1/2"	3"	4"
d	mm	10	10	15	20	25	32	40	50	65	80	100
L	mm	47.5	49.5	49	59	70	81	94	112	134	156	189
E	mm	11	11.4	9.5	11	12.5	13.5	15.5	17.5	19.5	21	24.3
W	mm	90	90	90	105	105	120	140	170	170	250	250
H	mm	38	38	39.5	47.5	51.5	62	71	85.5	98.5	112.5	135
SW	mm	17	21	25	31	38	47	54	66	83	97	124
weight	gr	140	153	182	307	465	795	1330	2280	3202	5376	9080

The information provided in this document is for general information purposes only and does not constitute advice. ERIKS shall not be liable for any damages resulting from the use of this document, including but not limited to damages caused by any incorrectness or incompleteness of the provided information, unless such damage is the result of any willful misconduct or gross negligence on part of ERIKS.

For more information, a quotation or an order please contact one of our specialists on number +31 (072) 514 18 00

ERIKS bv • P.O. box 280 • 1800 BK Alkmaar • phone (072) 514 15 14 • fax (072) 515 56 45 • info@eriks.nl • www.eriks.nl