


Stainless steel gate valve RX® fig. 508
full bore and non-rising spindle



hand-operated stainless steel gate valve with BSP female connection for steam, water, oil and gas applications

- Material body** : stainless steel, GX5CrNiMo19-11-2 (1.4408)
- Material bonnet** : stainless steel, GX5CrNiMo19-11-2 (1.4408)
- Slide** : stainless steel, GX5CrNiMo19-11-2 (1.4408)
- Spindle** : stainless steel, X5CrNiMo17-12-2 (1.4401)
- Gland nut** : stainless steel, GX5CrNiMo19-11-2 (1.4408)
- Gland** : stainless steel, X5CrNi18-10 (1.4301)
- Material spindle gasket** : PTFE
- Sealing cap** : PTFE
- Handle** : stainless steel, GX5CrNiMo19-11-2 (1.4408)
- Connection** : both sides BSP female connection as per BS 21
- Operating pressure** : PN16:
 - max. 16 bar at 38 °C
 - max. 1 bar at 180 °C

All gate valves in accordance with PED 97/23/EC

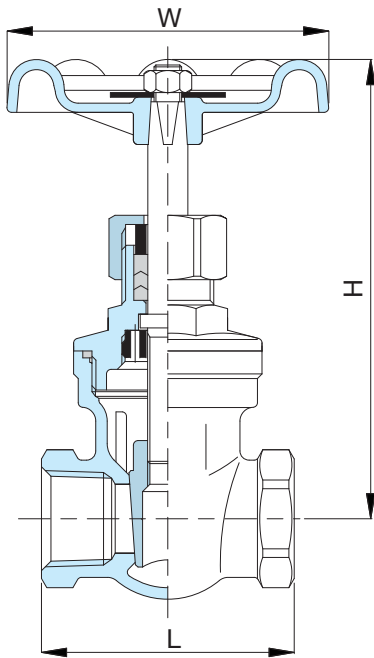

Tabel 1: Dimensions fig. 508

BSP		1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"
L	mm	55	60	65	75	85	95	116
H	mm	100	107	111	130	147	170	213
W	mm	75	75	75	75	95	95	95
weight	kg	0.43	0.63	0.82	1.12	1.62	2.27	5.22

The information provided in this document is for general information purposes only and does not constitute advice. ERIKS shall not be liable for any damages resulting from the use of this document, including but not limited to damages caused by any incorrectness or incompleteness of the provided information, unless such damage is the result of any willful misconduct or gross negligence on part of ERIKS.

For more information, a quotation or an order please contact one of our specialists on number +31 (072) 514 18 00

ERIKS bv • P.O. box 280 • 1800 BK Alkmaar • phone (072) 514 15 14 • fax (072) 515 56 45 • info@eriks.nl • www.eriks.nl