


**Stainless steel Y-type strainer RX®  
fig. 1660**




stainless steel Y-type strainer with BSP female connection for water, oil, air and gas applications

- Material body** : stainless steel, GX5CrNiMo19-11-2 (1.4408)
- Material bonnet** : stainless steel, GX5CrNiMo19-11-2 (1.4408)
- Drain plug** : stainless steel, X5CrNiMo17-12-2 (1.4401)
- Element** : stainless steel, X5CrNiMo17-12-2 (1.4401)
- Sealing cap** : PTFE
- Width of mesh** : approx. 0.8 mm
- Connection** : both sides BSP female connection as per BS 21
- Operating pressure** : PN40:
  - max. 40 bar at 38 °C
  - max. 1 bar at 180 °C



All Y-type strainers in accordance with PED 07/23/EC

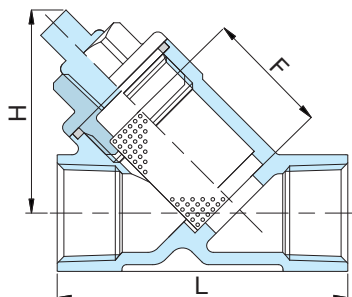

**Tabel 1: Dimensions fig. 1660**

BSP		1/4"	3/8"	1/2"	3/4"	1"	1.1/4"	1.1/2"	2"	2.1/2"	3"
L	mm	65	65	65	80	89	105	120	140	190	140
H	mm	45	45	45	53	65	70	80	103	103	142
F	mm	28	28	28	39	48	53	63	76	78	100
G	mm	31	31	31	36	45	50	59	75	95	112
weight	kg	0.26	0.26	0.24	0.36	0.69	0.86	1.02	1.88	5.14	7.26

The information provided in this document is for general information purposes only and does not constitute advice. ERIKS shall not be liable for any damages resulting from the use of this document, including but not limited to damages caused by any incorrectness or incompleteness of the provided information, unless such damage is the result of any willful misconduct or gross negligence on part of ERIKS.

For more information, a quotation or an order please contact one of our specialists on number +31 (072) 514 18 00

ERIKS bv • P.O. box 280 • 1800 BK Alkmaar • phone (072) 514 15 14 • fax (072) 515 56 45 • info@eriks.nl • www.eriks.nl